


TABLE A AIJ2

FROM	PIN	WIRE
A2J3-11	1	20
A5J2-14	2	12
A2J4-1	3	50
A2J4-8	4	10
A5J2-23	5	97
A5J2-15	6	23
A5J2-22	7	62
A5J2-8	8	70
A5J2-1	9	60
A5J2-2	10	20
A5J2-11	11	95
A5J2-21	12	47
A5J2-10	13	35
A5J2-7	14	91
A5J2-6	15	85
A5J2-20	16	98
A5J2-16	17	34
A2J4-4	18	40
A2J4-9	19	70
A5J2-13	20	
A5J2-12	21	
A4J4-16	22	96
A4J4-8	23	72
A8J1-7	24	70

INSERT TO BACK CAB. PLUG


AI INSERT

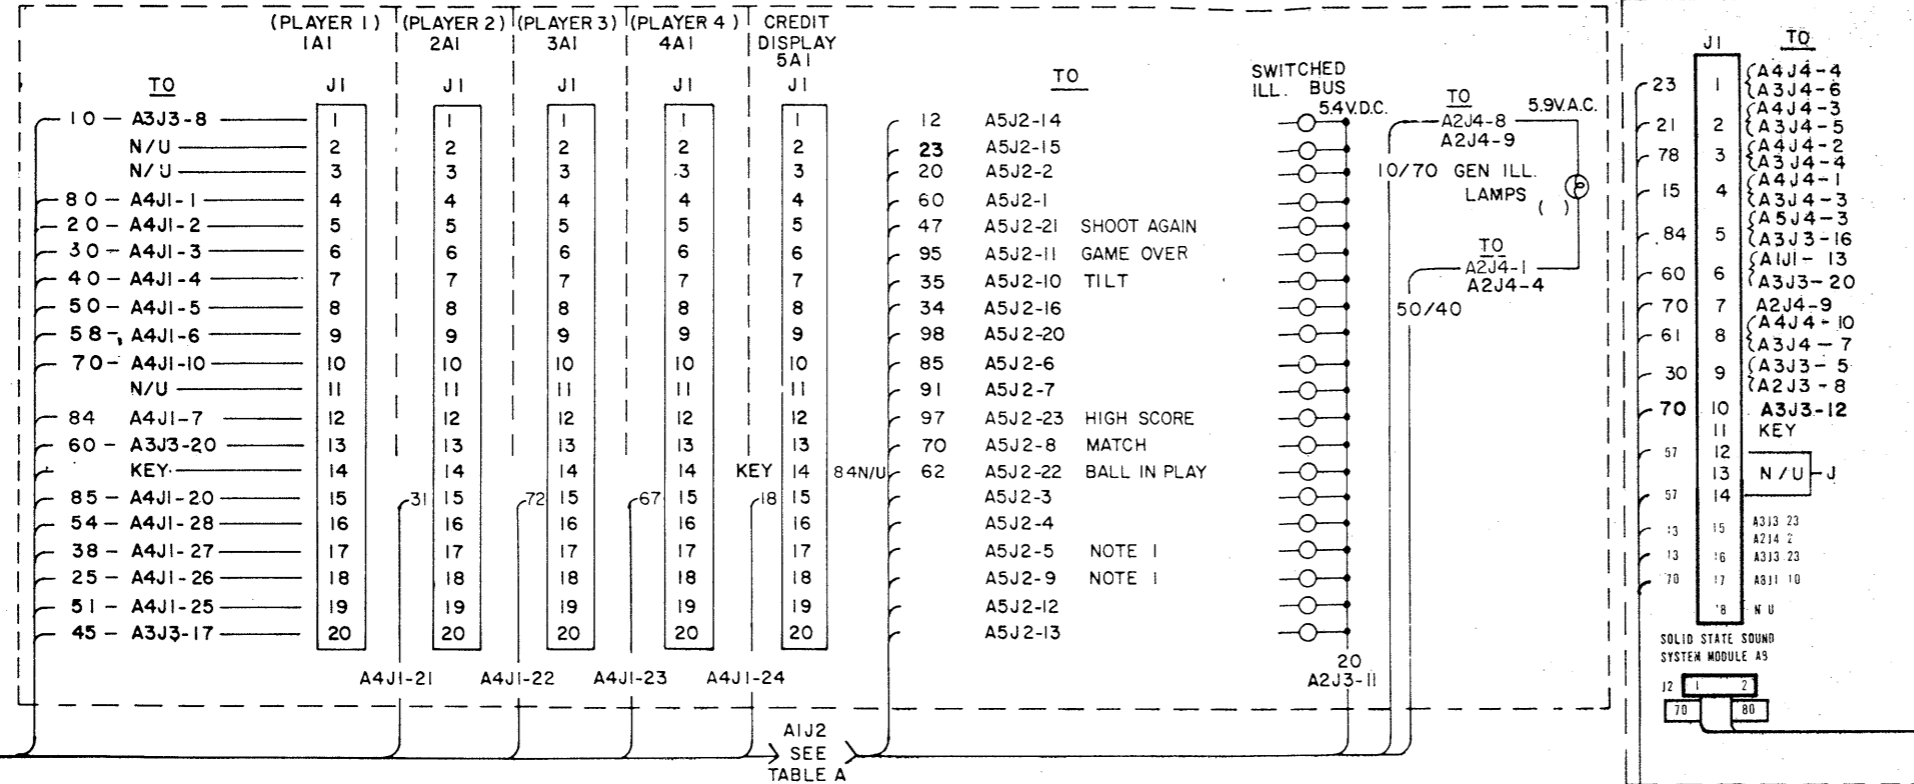


24 PIN PLUG		
FROM	PIN	WIRE
A2J4-4	1	40
A2J4-1	2	50
A2J3-2	3	18
A2J3-3	4	51
A2J4-8	5	92
A2J3-11	6	20
A2J3-10	7	70
A2J3-5	8	30
A2J4-9	9	70
A2J4-8	10	10
A2J3-9	11	90
A2J3-4	12	58
A2J3-5	13	52
A2J3-6	14	82
A2J3-1	15	56
A2J3-7	16	50
A2J4-2	17	13
A2J4-3	18	57
CABINET TO BACK BOX		

12 PIN PLUG		
FROM	PIN	WIRE
A5J2-14	1	12
A5J2-2	2	20
A5J2-15	3	23
A5J2-16	4	34
A5J2-1	5	60
A4J4-8	6	72
A5J2-6	7	85
A5J2-7	8	91
A4J4-16	9	96
A5J2-20	10	98
PANEL TO BACK BOX		


LAMP DRIVER A5

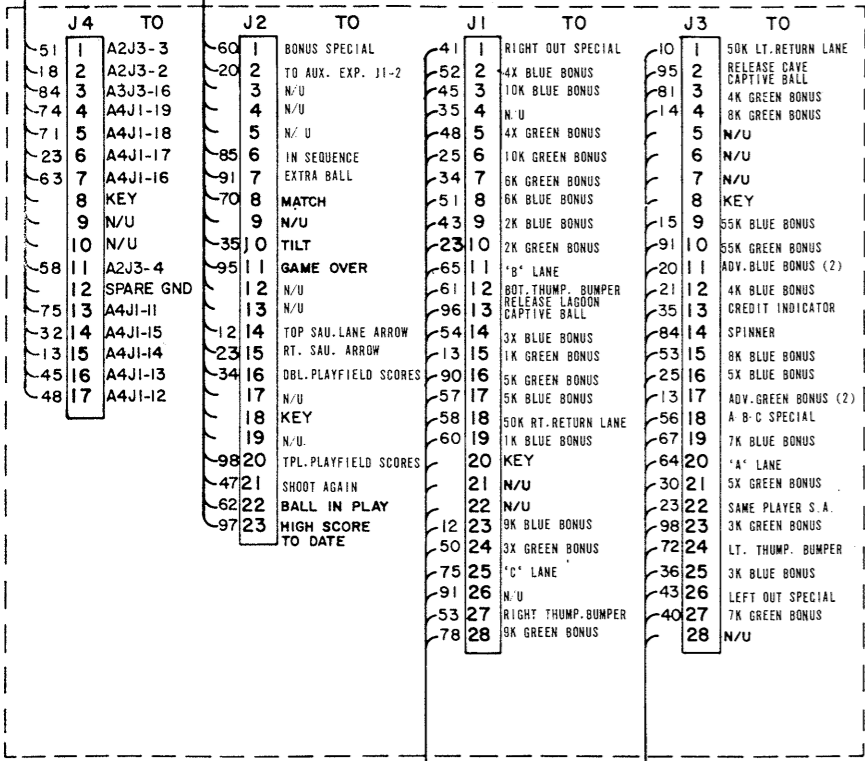

MPU A4

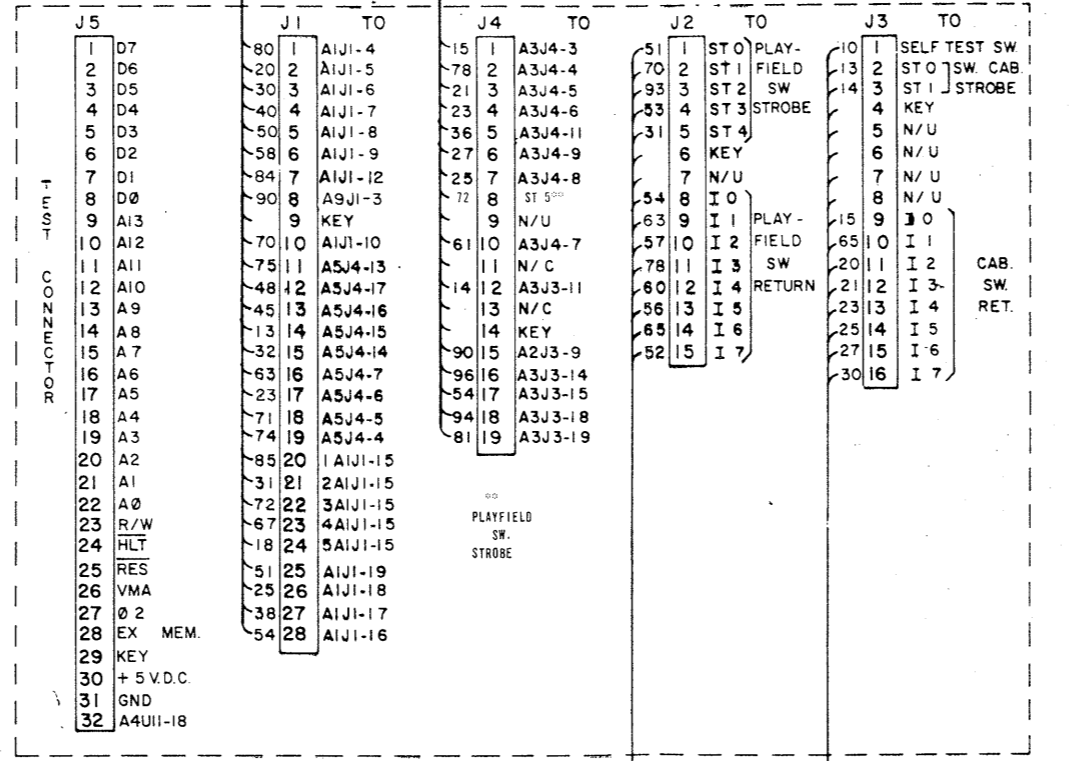

VOLTAGE REGULATOR / SOLENOID DRIVER A3

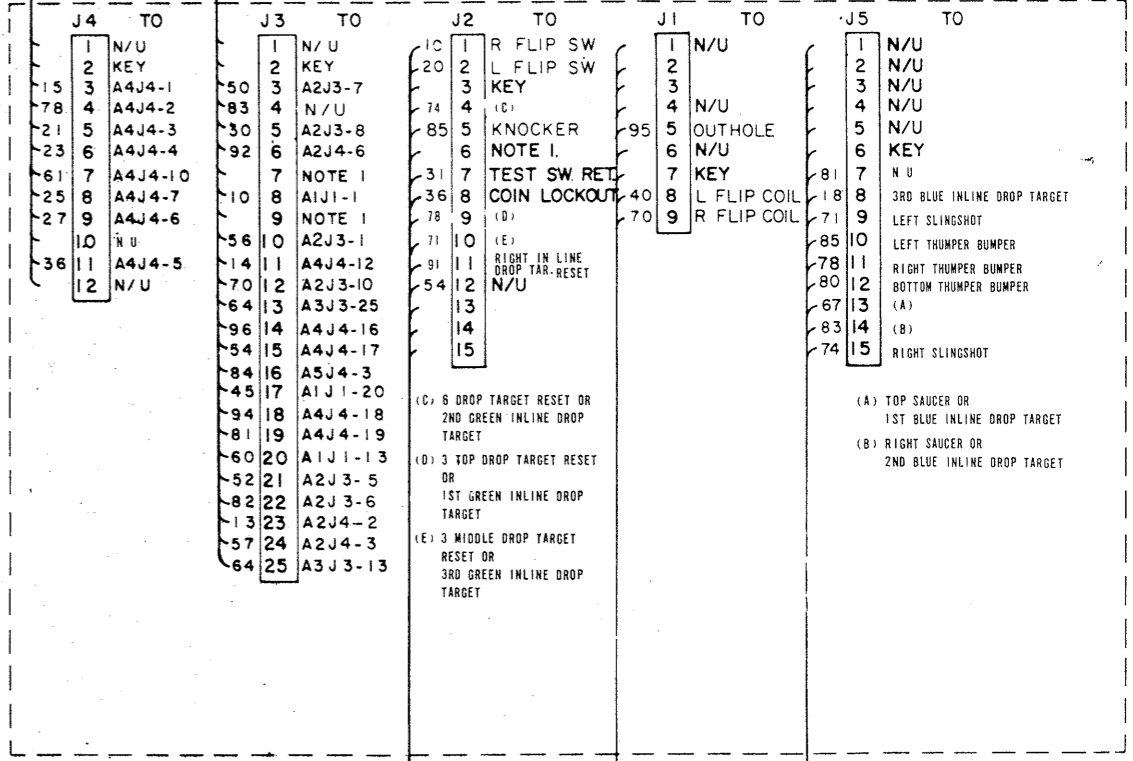

TO LOWER CABINET  
TO PLAYFIELD

- NOTES:
1. THESE PINS ARE RESERVED FOR FUTURE USE.
  2. WIRE COLOR ARE SHOWN FOR ALL CONNECTOR PINS, SOME WIRE MAY NOT BE USED IN ALL GAMES.
  3. \* INDICATES AID TEST POINT.

WIRE COLOR CODE	
1-RED	6-BROWN
2-BLUE	7-ORANGE
3-YELLOW	8-BLACK
4-GREEN	9-GRAY
5-WHITE	0-NO TRACE

REMOVED ALL BURRS

TOLERANCES ON DIMENSIONS UNLESS OTHERWISE SPECIFIED  
FRACTIONS - 1/64  
DECIMALS - .005  
ANGLES - °

DO NOT SCALE DRAWING

DATE: 5-8-81  
BY: J.D.

Bally MANUFACTURING CORP.  
2640 BELMONT AVENUE  
CHICAGO, ILLINOIS 60647

NAME: WIRING DIAGRAM BACKBOX  
MATERIAL: FATHOM  
PART NO: W-1187-30